Evaluation of Fog-Harvesting Potential in Namibia

<u>Vilho Mtuleni</u>, Joh R. Henschel & Mary K. Seely Desert Research Foundation of Namibia, P.O.Box 1592, Swakopmund, Namibia

Abstract: The potential of fog water being collected for domestic purposes by the rural Topnaar community was evaluated in the Namib Desert. This entailed gaining an understanding of climatological, temporal and spatial parameters of Namib fog, determining the water needs and ensuring participation and awareness by potential consumers of fog water. We recommend whether, how and where fog water can be collected to help alleviate the water shortage. The twelve objectives concern the quantity and quality of fog water, the collecting equipment, the water needs, information transfer, the identification of socioeconomic and environmental consequences, the design of a fog water supply scheme, dissemination of information and plans of phases 2 & 3. It was found that the quantity and quality of the fog suffice for a water supply scheme. Strong winds and variations in fog and in the water consumption affect the design. Following the fog water evaluation, a partnership is being formed with the community for the joint development of fog harvesting schemes. Fog water as a resource goes hand in hand with an integrated awareness of all natural resources and the need to manage them sustainably.

1. INTRODUCTION

The Central Namib Desert is an area without perennial rivers, receiving <20mm of rain and 30-180 mm of fog per year. Fog occurs on 60-200 days per year, making it a predictable source of water (Pietruszka & Seely, 1985; Seely & Henschel, 1998) for animals, plants (Seely, 1979, 1998), and humans. Some 100 000 people live in the cities of Swakopmund and Walvis Bay, coastal towns and villages. The latter include small communities of indigenous people, the Topnaar, and the research and training centre at Gobabeb, situated in the desert interior. Potable water is obtained from groundwater via manually maintained wells, boreholes, and the Central Namib Water Scheme based on aquifers in the ephemeral rivers, Kuiseb and Omaruru (Jacobson et al., 1995). Groundwater reserves depend on input from rainfalls in the >200km distant interior of Namibia's highlands. In recent years, water output has exceeded input and the groundwater is being depleted. Alternative water supplies will be required. Fog water has the potential to supplement small-scale users, as a model case developed in Chile has demonstrated (Cereceda et al., 1992; Schemenauer & Cereceda, 1994a). Fog could thus contribute to alleviating the water deficiency along the Namibian coast (Nagel, 1959; Nieman et al., 1978).

Phase 1 of the DRFN's Namfog project entails evaluating the potential for the rural Topnaar community to collect and use potable fog water. The occurrence, water content and climatological parameters of fog were investigated. From this information, the yield of fog water was determined as a fundamental premise to further objectives. Water needs and the social, environmental and economic considerations were taken into account in the preliminary design of a fog-water supply scheme for

a Topnaar village to serve as a model for others. The experience gained with pilot schemes in the proposed Phase 2 will facilitate the further application of this technology in Namibia.

In the current paper, we present the results of the first seven objectives of Phase 1 of the Namfog project, namely, quantifying the fog water yield, analysing its quality, testing fog-collecting equipment, assessing the water needs, informing and training potential water users, identifying the social and environmental factors concerning water use, and designing a fog-water supply scheme.

1.1 Quantify fog water yield

Fourteen Standard Fog Collectors (SFC, Schemenauer & Cereceda, 1994b) were placed at six sites near Topnaar villages along the lower Kuiseb River in the Central Namib Desert. SFC orientation was northwest. The SFCs were monitored manually or with data loggers between October 1996 and September 1997. Based on their physical characteristics, three sites near villages were selected for study, namely, Swartbank (altitude 332m amsl; distance from sea: 37km; distance from village: 8km), Klipneus (altitude 340m amsl; sea: 46 km; village: 2km), and Soutrivier (altitude: 387 m amsl; sea: 53 km; village: 0.3km). These villages were chosen because of their need of water.

We found that the annual daily average quantity of fog water collected with SFC's was highest at Klipneus, where it exceeded 1 litre/m² of collector/day (Table 1). There was, however, considerable seasonal variation in the frequency and wetness of fog (Figure 1, Table 1).

MINUTES OF THE SEVENTEENTH MEETING OF THE BOARD OF TRUSTEES, DESERT RESEARCH FOUNDATION OF NAMIBIA

09:00, 28 JANUARY 2001 TEA ROOM, GOBABEB

1. Opening and welcome

The Chairperson declared the meeting constituted and opened the meeting. Members present were welcomed.

2. Attendance

Attended by:

Apologies:

Mr Albi Brückner (Chairperson)

Hon Nangolo Mbumba

Mr Walter Böttger

Mr P Shiimi

Dr Mary Seely

Mr NS Goabab

Mr Eckart Pfeifer

Mr H Rumpf

Ms R Namises

Mrs Moizelle Dall (Scribe)

3. Minutes of the previous meeting

3.1 The minutes of the previous meeting dated 2 May 2000 has been approved as written with the following amendment. #Point 3.2.1, Attendance of meetings: Replace ... The Committee proposed that the names of ... "donors" with ... "board members" be incorporated on letterheads.

3.2 Matters arising

3.2.1 Attendance of meetings

- The committee proposed three regular meetings and one AGM per annum on a Thursday at 17:15. Dates will be identified at the beginning of the year that will be circulated to all members before 20 February 2001. Formal meetings will be held in Windhoek and not at Gobabeb.
- As per the constitution: Four members have to be present at meetings to represent a quorum but not more than 10 members to be appointed on the Board of Trustees. The committee felt that more high profile people be associated with DRFN. Dr Shivika has been identified. Dr Seely will forward a proposal to him.

4. Review of GTRC status

Dr Seely reported that tremendous progress has been made at Gobabeb. Main problems have been solved, with reference to permits, accommodation and telephone system. Payments by MET for 3 labourers are not sorted out yet. The final building phase of GTZ funding for 4 staff buildings, dining room and 4 additional rooms will be finished by October/November 2001.

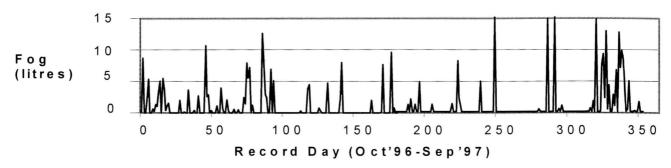


Figure 1: Quantity of fog recorded daily (litres/m²/day) over the course of 1 year at Klipneus.

Table 1: Fog records with SFC's at three Topnaar villages in the Namib Desert.

Place	Swartbank	Klipneus	Soutrivier			
Number						
record days	321	356	273			
fog events	108	111	60			
Quantity of water collected (litres / m ²) per						
fog event	2.384	3.345	0.437			
day: year	0.802	1.043	0.096			
day: Aug-Jan	2.720	2.122	0.704			
day: Feb-Jul	0.423	0.453	0.084			

During the "wet" 6 months (August-January), fog occurred on 45% of the days, and the average daily yield >2 litres/m²/day. By contrast, from February to July, fog occurred on only 15% of the days, yielding <0.5 litres/m²/day. Swartbank was similar to Klipneus, but Soutrivier received much less fog.

1.2 Analyse water quality

Water samples were collected from SFCs at Gobabeb and were sent to the Department of Water Affairs for analyses. Although the fog water is quite pure and of neutral pH (Eckardt, 1996), the SFC screen accumulates dust and wind-blown salts that get washed off by the fog water. The initial rinse off the SFC after a non-foggy period yielded turbid, brackish water (1630 mg NaCl.l⁻¹) that was only marginally fit for human consumption, but could be used for livestock. The subsequent water was considerably cleaner and of lower salt content (<1000 mg NaCl.l⁻¹). Equally good quality fog water has been analysed by Rössing Uranium Mine (Coetzee & Mulder, pers.comm.).

1.3 Test fog collecting equipment

The test screens were observed during and after dry, strong storm winds that occur during winter. Such winds, with average hourly speeds exceeding 12-16 m/s, gusting at an estimated 24-32 m/s, occurred on twelve occasions during 1997. Several SFCs were damaged

during winter storms and were strengthened with additional supporting structures. Some of the plastic logger equipment did not withstand this weather, resulting in data loss. We conclude that the fog collectors should be designed to withstand gusts of at least 35 m/s coming from an easterly direction (at right-angles or from the opposite direction to the fog).

1.4 Assess water needs

During winter and the summer school holidays we interviewed people at the three Topnaar villages Swartbank, Klipneus and Soutrivier concerning their water sources and requirements and obtained information on the population size of village and associated domestic animals. We also recorded the water management system and estimated the volume of water from the size of the containers used to fetch or store it at the homes.

The water sources are traditional, hand-dug wells of 5-15 m depth in the riverbed. In addition, there is a wind pump at Klipneus and a diesel pump at Soutrivier, both of them installed and maintained by the government. However, the pumps become unreliable when they are a few years old. The Swartbank people fetch a considerable proportion of their water with donkey carts from the 20-km distant Ituseb school that gets its water from the municipal supply of Walvis Bay. The current water supply is not conducive to keeping gardens.

The village populations fluctuate (Table 2). Residents are occasionally joined by job commuters to town and school children, who spend 10-25% of their time at the villages. People use between 11 and 68% of the total water consumed, and most goes to domestic animals, with cattle requiring about half of the water (Table 2). The consumption fluctuates least at Klipneus (47%), and most strongly at Soutrivier (137%). The total volume of water consumption is highest at Swartbank, where the need for a scheme to supplement the hand-dug wells and donkey-drawn water carts is highest. The water requirements could be halved by excluding cattle.

Funding is no more seen as "country funding" but in SADC perspective. Dr Seely referred to DRFN as the founding member of GTRC although GTRC has a SADC entity. Donors do not give money if it is not clearly designated. Dr Seely will formalise a draft letter to the Chairperson of the GTRC that the designation is transferred from DRFN to the Research Station in preparation for a meeting in June 2001.

5. Potential projects

- The Kuiseb project is still in negotiation with the EU.
- 2001 Community exchange visits: Proposal was sent to UNEP and IUCN Rosa. They will be re-submitted in correct format as specified by donor a.s.a.p
- Desertification 2002: DRFN is preparing for the International Symposium hosting 250 guests which will start off in Cape town, Rural Community interactions and Workshop at Gobabeb over the period 8 – 20 April. (Small information brochures to go out to all members)
- Dr Seely informed that Mr Bertus Kruger will take over the Management of DRFN if she could for one or another reason not continue her responsibilities at the Foundation.

6. Overview on financial reports

6.1 Reports:

An informal actual report from 1999-2000, March–June and July – December 2000 drafted by the DRFN Finance Manager were tabled. (Copy filed on record). The Chairperson expressed his dissatisfaction with the layout of the report and said that targets must be set for proper reports to be handed in up to Desember 2000 before end of February 2001. He also challenged the person responsible for last year's auditor's report to be forwarded to the Board by end February 2001.

6.2 Friends of Gobabeb:

The committee felt that DRFN should keep the money donated to the "Friends of Gobabeb" as they managed this fund raising effort since 1990. Any further donations should be for the GTRC as of 1 Jan 2001. Some fees have been spent on purchasing of equipment for the GTRC and the remaining part is on investment.

6.3 Purchasing of 5 Rossini property:

• Mr E Pfeifer explained the difficulty he experienced with the transferring of the cc into a trust. He managed to transfer it into a company name.

6.4 Staffing:

DRFN Offices

- Mr Brückner referred to explosion of people in DRFN offices. Dr Seely explained how funding and payment of salaries are structured.
- Three Grinell students are fully paid by their University as part of their service programme per annum

Table 2: Daily water consumption (litres) at three Topnaar villages.

Village		Swartbank		Klipneus		Soutrivier	
Consumer	Individual Needs	Population	Consume	Population	Consume	Population	Consume
People	22-30	15-42	330-1260	6-13	132-390	14-37	308-1110
Goats	2-4	96	192-384	50	100-200	53	106-212
Donkeys	16-18	44	704-792	20	320-360	16	256-288
Cattle	40-50	26	1040-1300	16	640-800	0	0
Dogs	2-3	6	12-18	7	14-21	10	20-30
Chickens	0.1	34	3	30	3	20	2
TOTAL			2281-3757		1209-1774		692-1642

1.5 Inform and train potential fog water users

The attitude of the people towards fog as a potential water source is as important as providing the ability to access this source. In preparation to managing fogcollecting schemes, the people of Swartbank, Klipneus and Soutrivier gained access to information and possibilities for hands-on training and experience concerning this technology. We worked with the Topnaar leaders towards a fully participatory relationship addressing fog harvesting as a component of sustainable resource management. The possibilities of forming water committees for each village, as is also promoted by the Department of Water Affairs, were discussed and these are in an early planning stage. Those residents who assisted actively in the project helped to explain the process to other villagers so that the technology is by now familiar to many Topnaars.

1.6 Identify social and environmental aspects of collecting, supplying and using fog water

People living along the lower Kuiseb River are in need of alternative water sources. However, following years of Government dependency, they seem to have accepted their daily struggle with the existing system as a way of life: they walk long distances to hand-dug wells that require much maintenance, while they wait patiently for a Government technician to arrive to fix a pump. On the other hand, they have expressed interest in a reliable system that they can maintain themselves with little effort. However, they currently have limited funding and do not intend to invest this towards a new water scheme, a service always provided by Government in the past. The means to afford to run the fog harvesting technology would need to be developed through a lengthy participatory process parallel to and integrated with that of the Department of Water Affairs which is focused on fostering self-responsibility for the management of this resource.

Given a more reliable source of water, the Topnaars could diversify their activities, for instance to include gardens or to attract tourists. This should improve their living standards. On the other hand, people indicated that if they obtained more water, they would keep more goats. This could increase the impact that these animals would have on the environment. However, the need for careful management of fog water may mitigate this change. Integrated water and range management is also an objective of the Department of Water Affairs.

1.7 Design a fog-water collection and supply scheme

The above points were taken into consideration in designing a pilot fog collecting and supply scheme. The suggestion that the first experimental fog water supply scheme be constructed at Klipneus has been discussed by the Topnaar community, although a final decision is awaited. The lessons from this scheme would facilitate planning for the more complex situation at Swartbank. In the meantime, we have made a preliminary design for the Klipneus conditions based on the model at Chungungo in Chile (Cereceda *et al.*, 1992, 1996). This design assumes that fog water will become the only water source, but a hybrid system may be more realistic.

The following factors were taken into account for the design: a) seasonal variation in fog water availability, b) the effect of the storage capacity on water availability, c) the consumption rate that can be sustained without running the storage tank dry, and d) the ability to vary the consumption rate. The optimal magnitude of each factor was calculated. Most importantly, due to the intervals between fog events, the reservoir can frequently run empty unless the consumption is managed. Ideally the water will be rationed, i.e. an adequate quantity be made available each day, which cannot be exceeded if a tap is inadvertently left open. The resulting design comprises the following elements:

• enough fog collecting units of 48 m² each (modified after Cereceda *et al.*, 1996) to supply the average daily water requirements

- 4-5 MSc Students (last year of study)
- 4 Norwegians DRFN get a fee to manage their activities
- Joint proposals with project through DWA
- Majority of staff are appointed and covered within project budgets
- Organisational Development project: Norwegian Funding. Recommendations by the OD consultant will be forwarded to the Board members by March/April 2001.
- Possible new project, ELAK: Experimental Learning and Action in the Kuiseb.

• Resignations:

Dr Seely referred to the vacancy of the Maintenance Managers Position at GTRC as well as Dr J Zeidler, Napcod Project Manager, who both will leave their positions at the end of January 2001. Mr Bertus Kruger will take over the responsibilities of Dr Zeidler for a period of 6 months with the assistance of Rukee Tjingaete as the Namibian Counterpart in the process.

7. General

- 7.1 Representation at GTRC
- Centre Manager: E Mwenya
- Maintenance manager: Vacant
- Clerical Assistant: R Nawa
- 3 Laborers from MET
- LTER/Drago staff members:
 - Research Assistant: V Mtuleni
 - Information Resource Assistant: L Moncho
- Additional staff: (4 Volunteers)

7.2 Inauguration of new GTRC facilities

 Dr Seely informed that the Secretary General to Combat Desertification will inaugurate the centre for SADC at the big weekend on 1 – 3 February 2002. Suggestions were welcomed.

suggestions were wercomed.	
	dates
9. Adjournment The meeting adjourned at 10:50	to be followed by the AGM. immediately
Confirmed as a true record of the proceedi	ings.
SECRETARY	CHAIRPERSON
DATE	

- pipes and sedimentation tanks
- a reservoir to sustain the consumers for up to 3 weeks without fog
- a tank to contain the daily ration of water for households as well as domestic animals other than cattle
- another tank for the daily water ration for cattle at times when the main reservoir is over half full; cattle require alternative water when the reservoir is less than half full.

1.8 Conclusions and Recommendations

Fog has the potential of providing potable water to villages of indigenous people in the Namib Desert. This is possible only at places located <50 km from the Atlantic Ocean, where the average daily yield is >1 litre/m²/day. In partnership with the Topnaar community, an experimental pilot plant should be built and managed at a village such as Klipneus. Important factors that influence the construction are the seasonal fluctuations of fog water supply and of its consumption as well as the occurrence of dry storm winds. It is very important that the water consumers adopt the idea that fog is a resource that they can use sustainably.

Other methods of fog collection are being examined at Gobabeb (Shanyengana, pers.comm.) and elsewhere in the Namib (DWA; Coetzee & Mulder, pers.comm.) as possible alternatives to the Conaf design used at Chungungo, Chile, that serves as our initial model. Fog harvesting should be considered in conjunction with other water sources and hybrid systems may be better than specialised ones.

Other uses of fog water should also be considered. For instance, if the indigenous !Nara plant is supplemented with water, it may increase the harvest of melons for the Topnaars (Dausab & Henschel, 1997). People in the coastal town of Swakopmund are investigating the possibility of watering vegetables with fog water (Coetzee & Mulder, pers.comm.). Indeed, fog water could turn out to be a valuable supplementary water source to help alleviate the water shortage along the Namibian west coast.

1.10 Acknowledgements

Funding was granted by the International Development Research Centre, Canada (IDRC) and Environmental Capacity Enhancement Project, University of Guelph, Canada (ECEP). Training in Chile was supported by the IDRC, the Pontificia Universidad Catolica de Chile, Santiogo de Chile, and the Corporación Nacional Forestal, Le Sarena. We owe particular gratitude to Mr. and Ms. Alois and Hermina! Narib and Mr. Daniel Cloete

for field assistance and information dissemination and Mr. Rudolf Dausab for facilitating liaison with the community. Prof. Pilar Cereceda, Dr. Bob Schemenauer, Mr. Roland Roeis and Mr. Elias Shanyengana provided valuable support, advice and guidance. The project benefited from close collaboration by the Department of Water Affairs. Numerous volunteers and several residents of Swakopmund and Walvis Bay assisted enthusiastically and, in particular, we thank Ms. Nina Gruntkowski and Mr. Rainer Krug for assisting with data analyses. The Ministry of Environment and Tourism granted permission to conduct this study in the Namib-Naukluft Park.

2. REFERENCES

- Cereceda, P., A. Cruzat, J. Ossandon, & R. Schemenauer, 1996: Prospection, evaluation and construction of fog water collection systems: a new technology of simple application and large economic and social impact. *IDRC/CIID-GAFCS*, 80 pp.
- Cereceda, P., R.S. Schemenauer, & M. Suit, 1992: An alternative water supply for Chilean coastal desert villages. *Water Resources Development* 8, 53-59.
- Dausab, R. & J.R. Henschel, 1997: Nara workshop of the 19th November 1997 at Lauberville. Proceedings, Desert Research Foundation of Namibia and Topnaar Community, 10 pp.
- Eckardt, F., 1996: *The distribution and origin of gypsum in the Central Namib Desert, Namibia.* PhD Thesis, University of Oxford, 320 pp.
- Jacobson, P.J., K.M. Jacobson, & M.K. Seely, 1995: Ephemeral rivers and their catchments: sustaining people and development in western Namibia. Desert Research Foundation of Namibia, Windhoek, 167 pp.
- Nagel, J.F., 1959: Fog precipitation at Swakopmund. *Union of South Africa Newsletter* 125, 1-9.
- Nieman, W.A., C. Heyns & M.K. Seely, 1978: A note on precipitation at Swakopmund. *Madoqua* 11, 69-73.
- Pietruszka, R.D. & M.K. Seely, 1985: Predictability of two moisture sources in the Namib Desert. *South African Journal of Science* 81, 682-685.
- Schemenauer, R.S. & P. Cereceda, 1994a: Fog collection's role in water planning for developing countries. *Natural Resources Forum* 18, 91-100.
- Schemenauer, R.S. & P. Cereceda, 1994b: A proposed standard fog collector for use in high-elevation regions. *Journal of Applied Meteorology* 33, 1313-1322.
- Seely, M.K., 1979: Irregular fog as a water source for desert dune beetles. *Oecologia* 42, 213-227.
- Seely, M.K. & J.R. Henschel, 1998: The climatology of Namib fog. *This Volume*.
- Seely, M.K., J.R.Henschel & M. Robertson, 1998: The ecology of fog in Namib sand dunes. *This Volume*.

Rina SHERMAN

P. B. 20484, Windhoek 19 Olof Palme Street, Klein Windhoek Tel. / Fax: 27 15 69, Cellphone: 081 129 1114

INVITATION

I have the pleasure to invite

Dr. Mary 8HELY

to a cocktail party

on

Tuesday, the 6th of March, 2001

at

18h30

Address: 19 Olof Palme Street, Klein Windhoek

RSVP: Tel. / Fax: 27 15 69 or 081 129 1114